


# DataSheet

## Polyethylene Sheet

# ProSpare

POWDER PROCESSING EQUIPMENT

Ultra high molecular weight polyethylene sheet has an exceptionally low co-efficient of friction. It's non-stick qualities make it ideal for lining bunkers, chutes and hoppers particularly in applications involving materials with poor flow characteristics. We offer polyethylene sheet in virgin grade (white) and regenerated grade (black or green).

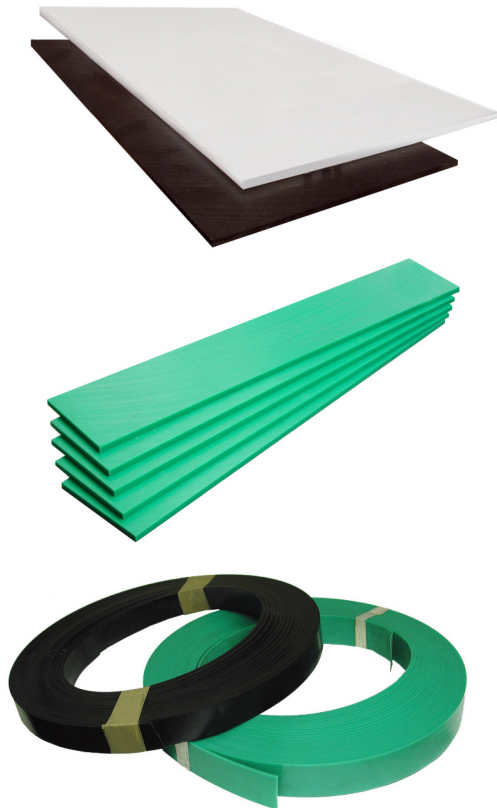

**Low co-efficient of friction**

**Improves material flow**

**Abrasion resistant**

**Easily formed and fixed**

**Water repellent**

**Non hygroscopic**

**Chemical resistant**

**Suitable for most applications**

<b>Stock sizes</b>			
Stock No	Description	Thickness	Weight
031922	Regenerated Polyethylene Sheet 2m x 1m	6mm	12 kg
031923	Regenerated Polyethylene Sheet 2m x 1m	8mm	16 kg
031924	Regenerated Polyethylene Sheet 2m x 1m	10mm	20 kg

Polyethylene sheet is available to order in the following sizes:

2m x 1.0m sheet in thicknesses from 2mm - 250mm thick

3m x 1.2m sheet in thicknesses from 2mm - 250mm thick

Wear strips and coils are available to suit your requirements, details on request.

**ProSpare**

Bestwood Road • Pinxton • Nottinghamshire NG16 6NT  
Tel • +44 (0)1773 814008 • Fax • +44 (0)1773 860055 • Email • sales@prospare.co.uk

[prospare.co.uk](http://prospare.co.uk)

We reserve the right to modify or withdraw specifications or products without notice or obligation.